


rBOX103

Robust Din-rail Fanless Embedded System with Intel® Atom™ Processor Z510PT/ Z520PT up to 1.33 GHz, Intel® US15WPT Chipset and 2 Isolated CAN Bus

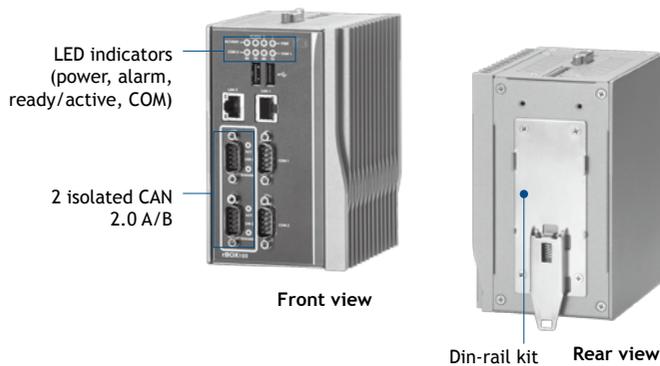

Features

- Fanless and cableless design
- Wide temperature operation of $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- Supports 2 isolated CAN 2.0 A/B
- Supports 2 isolated Ethernet
- 2 watchdog timer
- LED indicators
- Optional 1 wireless (Wifi or 3G)
- SNMP V1/V2c
- Support one CompactFlash™, one SD card (optional)
- 2 power paths with terminal block and 12-48VDC
- Supports AXView monitoring software package

Introduction

rBOX103 Din-rail fanless embedded field controller supports extra low power Intel® Atom™ processors Z510PT and Z520PT with extended temperature range of -40°C to $+70^{\circ}\text{C}$ for use in extreme operating environments.

To prevent ESD and over-voltage, this super compact rBOX103 is equipped with two isolated CAN 2.0 A/B, two isolated Ethernet for offering magnetic isolation protection. Two power paths input minimize the risk of data loss in the event of a single power failure. rBOX103 is powered by IP30 housing, wide operating

temperature range and Safety/EMI/EMS compliance. Besides, it is also specially designed for remote control/ monitoring management applications like automatic parking lot, traffic cabinet and more.

rBOX103 features rich expansion for communication such as CAN bus in-vehicle network. The ready-to-run rBOX103 equipped with AXView monitoring software is a total solution for facility monitoring systems, intelligent transportation systems, and more.

Specifications

Standard Color	Sliver-Black	Storage	Supports 1 x CompactFlash™ Supports 1 x SD card up to 32 GB (optional)
Construction	Extruded aluminum and heavy-duty steel, IP30	Installation	Din-rail, wall mount
CPU	Intel® Atom™ processor Z510 PT (1.1 GHz) or Z520 PT (1.33 GHz)	Power Supply	2 power paths Power Input Range 12-48VDC Power Protection DC Version: OVP (over voltage protection) UVP (under voltage protection) Reverse protection
System Board	RM820	Power Consumption (COM port link up)	With no load on 2 USB ports: 0.99A @ 12V, 11.88W 0.5A @ 24V, 12W 0.34A @ 36V, 12.24W 0.26A @ 48V, 12.48W with full load on 2 USB ports: 1.4A @ 12V, 16.88W 0.7A @ 24V, 17W 0.47A @ 36V, 17.24W 0.36A @ 48V, 17.48W
System Memory	1 x 200-pin DDR2 SO-DIMM max. up to 2 GB	Operating Temperature	$-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ ($-40^{\circ}\text{F} \sim +158^{\circ}\text{F}$)
System I/O Outlet	Serial Port 2 x RS-232/422/485 (COM 1/2) (isolated COM as option) Interface select by software or BIOS Supports Auto Flow Control in RS-485 mode ESD protection 15 KV Serial port speed up to 115.2kbps LAN 1 x 10/100/1000Mbps Ethernet 1 x 10/100Mbps Ethernet Magnetic isolation protection 1.5 KV USB 2 x USB2.0 USB power distribution control by software CAN 2 CAN 2.0 A/B (DB9 connector) Meets ISO 11898 standard Software control termination resistor 120 ohm Magnetic isolation protection 2.5KV Transmitter baud rate from 5kb/s to 1Mb/s VGA 1 x DB15 connector Power Input 2 x DC power input with terminal block Alarm Contact One relay output with current 0.5A @30VDC Wireless 1 x Mini Card (Supports USB only) (upon request) 1 x SIM socket onboard	Storage Temperature	$-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$ ($-49^{\circ}\text{F} \sim +185^{\circ}\text{F}$)
Watchdog Timer	2 WDT WDT 1: one step is 1 sec, 255 levels WDT 2: one step is 250ms, 255 levels	Humidity	5% - 95%
LEDs	System Power, Alarm, Ready/Active, COM (TXD,RXD), CAN (Act, Termination Indicator) Alarm DC PWR1 or PWR2 is lost (default) User define event (option)	Weight (net/gross)	1.38 kg (3 lb)/1.72 kg (3.78 lb)
		Dimensions	81 mm (3.18") (W) x 110 mm (4.33") (D) x 135 mm (5.31") (H)
		EOS Support	XPE, WinCE, Linux, Windows® 7
		ISO	Manufactured in an ISO9001 facility
		Safety	UL508
		Compliance	UL60950-1 EN60950-1 IEC60950-1


EMI Compliance	FCC part 15, class A
	EN61000-6-4 * EN55022 * EN61000-3-2 * EN61000-3-3
EMS Compliance	EN61000-6-2
	EN61000-4-2 (ESD standards)
	* Contact: +/- 6 KV; criteria B
	* Air: +/- 8 KV; criteria B
	EN61000-4-3 (radiated RFI standards)
	* 10V/m, 80 to 1000 MHz; 80% AM criteria A
	EN61000-4-4 (burst standards)
	* Signal ports: +/- 2 KV; criteria B
	* DC power ports: +/- 2 KV; criteria B
	EN61000-4-5 (surge standards)
	* Signal ports: +/- 1 KV; line-to-line; criteria B
	* DC power ports: +/- 0.5 KV; line-to-earth; criteria B
	EN61000-4-6 (induced RFI standards)
* Signal ports: 10 Vrms @ 0.15 - 80 MHz; 80% AM criteria A	
* DC power ports: 10 Vrms @ 0.15 - 80 MHz; 80% AM criteria A	
EN61000-4-8 (magnetic field standards)	
* 30 A/m @ 50, 60 Hz; criteria A	
Environmental Test Compliance	IEC60068-2-6 Fc (vibration resistance)
	5 g @ 10 - 150 Hz, amplitude 0.35 mm (operation/storage/transport)
	IEC60068-2-27 Ea (shock) 25 g @ 11 ms (half-sine shock pulse; operation);
	50 g @ 11 ms (half-sine shock pulse; storage/transport)
	IEC60068-2-32 Ed (free fall) 1 M (3.281ft)

Ordering Information

Standard	
rBOX103-FL 1.1G	Robust Din-rail fanless embedded system with Intel® Atom™ processor Z510PT 1.1 GHz and 2 isolated CAN 2.0 (-40°C ~ +70°C)
rBOX103-FL 1.33G	Robust Din-rail fanless embedded system with Intel® Atom™ processor Z520PT 1.33 GHz and 2 isolated CAN 2.0 (-40°C ~ +70°C)
Optional	
DDR2 SODIMM	1 GB - 2 GB (with W.T. memory)
DDR2 SODIMM	1 GB - 2 GB (with 0°C ~ +85°C memory; operating temperature: 0°C ~ +70°C)
CompactFlash™	1 GB or above (with W.T. CF)
Wall mount kit	
Wireless (wifi or 3G) upon request	

*Specifications and certifications are based on options and may vary.

Dimensions

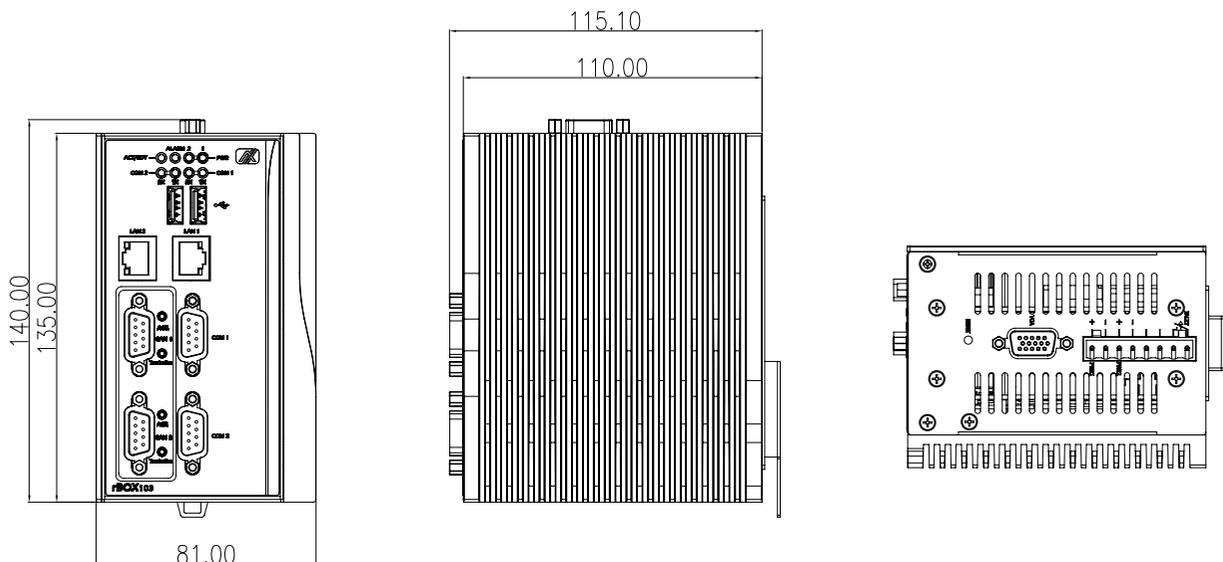

Overview

Embedded Systems

Embedded Systems for Transportation

Embedded Field Controllers

Embedded MicroBoxes

Industrial Barebone Systems

Industrial Chassis

Backplanes

Power Supplies

Peripherals & Accessories